


FLEXIBLE PAVEMENT

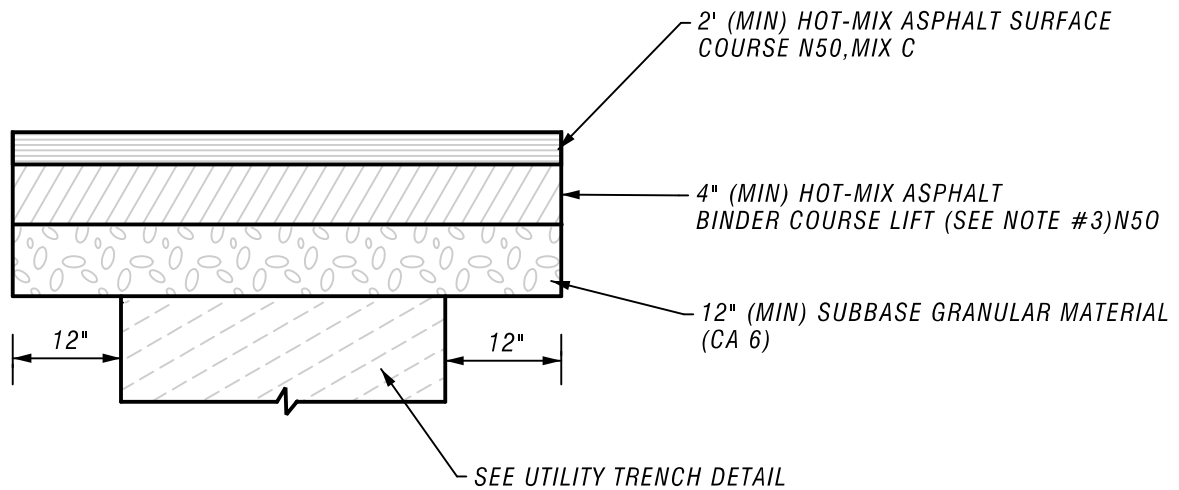

NOT TO SCALE

NOTES

1. ALL PAVEMENT PATCHES SHALL BE SAWCUT FULL-DEPTH A MINIMUM OF ONE FOOT BEYOND THE LIMITS OF PAVEMENT REMOVAL IN ALL DIRECTIONS
2. PORTLAND CEMENT CONCRETE IF SPECIFIED SHALL CONFORM TO IDOT CLASS PV
3. 4" (MIN) BINDER TOTAL OR MATCH EXISTING THICKNESS, WHICHEVER IS GREATER.

REVISED 12-16-24



PAVEMENT PATCH DETAIL

